



# CHARON™-VAX/XL Plus for Windows



## SALEM AUTOMATION INCORPORATED

4500 Indiana Ave Suite 40  
Winston-Salem, NC 27106


Phone: 336-661-0890

Fax: 336-661-9575

charon\_sales@salemautomation.com

### Functionality

**CHARON-VAX/XL Plus** is designed to prolong the use of the VAX/VMS operating system, layered products and user applications. The hardware components emulated by CHARON-VAX/XL Plus are designed to operate like their hardware equivalents. CHARON-VAX/XL Plus can in principle execute any VAX operating system or binary application that runs on its equivalent hardware VAX configuration. It is designed to replace single CPU VAX machines in administrative environments with terminals connected via terminal servers. The emulated functionality does not include diagnostic or maintenance modes or delays to simulate mechanical device behavior. For a list of emulated components please see the Features Matrix.

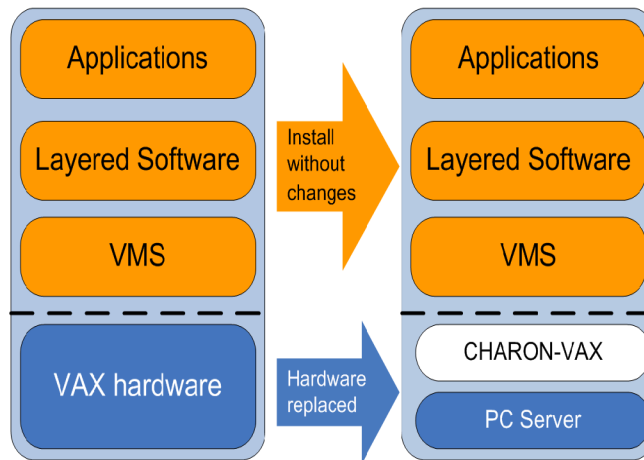

**CHARON-VAX/XL Plus for Windows** is a third generation VAX system emulator. By emulating a variety of VAX CPUs with different features, CHARON-VAX/XL Plus can replace a wide range of VAX server hardware with modern Windows servers running CHARON-VAX/XL Plus as a Windows application. CHARON-VAX/XL Plus provides

an exact model of the emulated CPUs, on which VAX/VMS, layered software and user applications execute unmodified. No conversion of binary VAX code is required. The Plus option for the CHARON-VAX/XL emulator provides a 2 to 3 times improvement of VAX CPU emulation by means of Advanced CPU Emulation mode (ACE). The compatibility of the emulator with VAX hardware is tested with the original VAX hardware design tools and diagnostics.

## Features

- ◆ Provides VAX CPU emulations for VAXserver 4000-108 or MicroVAX 3100-98. Only one of these CPUs can execute at a given time.
- ◆ Does not require VAX application code conversion nor application sources. VMS, layered software and applications can be directly installed on CHARON-VAX/XL Plus and do not require any modifications. The application binaries, user interface and functionality remain unchanged.
- ◆ Each emulated VAX model follows the characteristics of the VAX hardware it is derived from, requires the corresponding level of VAX/VMS license units and supports the peripherals particular to that VAX model. See the Features Matrix on the next page.
- ◆ Installs and runs the standard VAX/VMS and other standard VAX operating systems.
- ◆ CHARON-VAX/XL Plus can operate as an unattended Windows service.
- ◆ VMS and layered product transfer licenses from an existing VAX system to CHARONVAX/XL Plus are available from HP.
- ◆ Passes HP's AXE architecture test for VAX instruction compatibility.
- ◆ CHARON-VAX/XL Plus emulates up to 512 MB VAX memory.
- ◆ The Ethernet adapter(s) emulator supports 10 or 100 (\*) Mbps network connections to other systems, NI clusters, terminal servers and X-terminal (emulators). Emulation is transparent to DECnet and/or TCP/IP network protocols.
- ◆ CHARON-VAX/XL Plus can be configured as a VMS NI-cluster member or as a cluster member with shared disk clustering.
- ◆ Upgrading to a faster host system provides an immediate emulator performance increase.
- ◆ Provides a choice between one year (extendable) or perpetual usage licenses.
- ◆ Two levels of optional software support service.



Systems Integration Specialist

The CHARON name with its logo is a registered trademark of Software Resources International. All other trademarks are the property of their owners.

### Advanced CPU Emulation

ACE dynamically optimizes the VAX instruction interpretation. This does not require code pre-processing and provides its full capability instantly. As the optimization takes place below the emulated hardware level, the emulator remains fully VAX hardware compatible and is completely transparent to VAX operating systems and applications.

### Host system requirements

A dedicated Windows 2000 Professional, XP or 2003 Server Standard Edition host system with a dual CPU of at least 1 GHz, a CD-ROM, minimum one (1) dedicated Ethernet adapter, a USB port for the license key and enough storage space for the VAX disks. The minimum host memory requirement depends on the CPU emulated and whether ACE is used. For a list of emulated components please see the features matrix.

### Recommended tools

HP Pathworks 32:

- VT525 terminal emulator
- X-terminal emulator
- Windows file copy

### Product contents

User manual  
Distribution CD  
License key

### License key

The CHARON hardware license key is permanently connected to the host system running the emulator. It preserves the customer specific license parameters, allows remote electronic updates and enables rapid change of host systems as the CHARON executable itself can be installed on multiple systems. The MTBF of the key is more than 100 years. For mission critical applications a backup key containing 720 hours execution time can be ordered to meet any disaster recovery plan that requires replacement hardware.

### Warranty

The 3 months standard warranty for this product is for the readability of the distribution media.

## Typical applications

- ◆ Replacing any VAX platform requiring up to 512 MB of VAX memory with a Windows host system while using unmodified VAX application software.
- ◆ With the Plus version, improving VAX system performance for the CPU- or I/O-intensive workloads (up to 85 VUPs depending on the host platform), while replacing the hardware with a Windows platform.
- ◆ Replacing departmental or corporate VAX computers by modern host systems to reduce maintenance, space and operating costs.

## Features Matrix

	VAX 4000-108	VAX 3100-98
<b>Emulated VAX CPU</b>	KA57-A	KA59-A
<b>Earliest VMS version supported</b>	5.5	5.5
<b>Maximum VAX memory emulated</b>	512 MB	512 MB
<b>(T)MSCP Device Controller</b>	Yes <sup>1 2</sup>	n/a
<b>SCSI Subsystem</b>	Two controllers, each supporting seven addresses; using LUNs each address supports eight similar devices	
<b>VAX SCSI disks</b>	VAX SCSI disks can be represented by physical SCSI disks or disk image files	
<b>VAX SCSI tapes</b>	SCSI tape drives connect via a host SCSI port	
<b>Ethernet</b>	Up to five Ethernet adapters in total including one SGEC. Connections to 100 Mbps possible with the Plus option, giving an aggregate throughput ~20 Mbps <sup>1</sup> . Non-Plus option connects to 10 Mbps.	One SGEC adapter. Connection to 100 Mbps possible with the Plus option, giving an effective throughput ~20 Mbps <sup>1</sup> . Non-Plus option connects to 10 Mbps.
<b>VAX/VMS clustering</b>	NI Cluster or Shared Disk Clustering with simulated MSCP controllers	NI Cluster
<b>Asynchronous serial line emulation</b>	CXA16, CXB16, CXY08, DHQ11, DHV11, DHW42-AA, DHW42-BA, DHW42-CA	DHW42-AA, DHW42-BA, DHW42-CA
<b>Qbus subsystem</b>	Yes <sup>2</sup>	N/A
<b>Host memory requirement</b>	1 GB (2GB with ACE)	1 GB (2GB with ACE)

<sup>1</sup> Configurable Qbus components are the MSCP disk controller RQDX3, the TMSCP tape controller TQK50, the serial line controllers as above, and the Ethernet controllers DEQNA, DELQA and DESQA.

<sup>2</sup> MSCP disk emulation is the preferred storage device emulation in the case of heavy disk I/O.

<sup>3</sup> Running on a 2.8 GHz dual CPU Xeon, Windows XP, SP1, Hyper-Threading.

## Ordering information CHARON-VAX/XL Plus for Windows

- Unlimited run time license
- Initial (one year) license
- License extension for one year
- GOLD Support 8-5 Monday - Friday
- PLATINUM Support 24 hours x 7 days

### Contact:

**Chuck Graham**  
Southeast-West  
VP-Sales & Marketing  
Salem Automation Inc.  
4500 Indiana Ave. Suite 40  
Winston-Salem, NC 27106  
336-661-0890 x 106

**Bob Gyles**  
Northeast Regional  
Sales Manager  
Boston, MA  
978-425-2582

**John Mercier**  
Western Regional  
Sales Manager  
Phoenix, AZ  
480-633-5739

**E-mail: charon\_sales@salemautomation.com**